

# Construction details

## Refrigerant condensers

### Construction details

#### 1. Material options

- The unique [Baltibond® hybrid coating](#) is **standard for maximum equipment life**. This hybrid polymer coating is applied before assembly to all hot-dip galvanized steel components of the unit.
- Optional [stainless steel](#) panels and structural elements of type 304L or 316L for extreme applications.
- Or the economical alternative: a **water-contact stainless steel cold water basin**. Its key components and the basin itself are stainless steel. The rest is protected with the Baltibond® hybrid coating.



## 2. Heat transfer media

- Our heat transfer media is a **condensing coil**. Its thermal performance is proven during comprehensive [lab thermal performance tests](#), and it offers you unrivalled system efficiency.
- The coil is constructed of prime surface steel, hot-dip galvanized after fabrication. Designed for maximum 23 bar operating pressure according to PED. Pneumatically tested at 34 bar.



- All hot dip galvanized and stainless steel coils are delivered with BAC's **Internal Coil Corrosion Protection**, to ensure an optimal internal corrosion protection and guaranteed quality.

Try our Polairis™ coil options:

- **Extended surface coils** with selected rows, finned at 3 to 5 fins per inch and hot-dip galvanized after fabrication, for dry operation during winter time.
- **Multiple circuit coils (split coils)** for your halo carbon refrigerants, maintaining individual compressor systems. Or use it for compressor jacket water or glycol cooling.
- **Stainless steel coils** are in type 304L or 316L.
- **High pressure coils** are designed for 28 bar operating pressure and pneumatically tested for 40 bar. Hot-dip galvanized after fabrication.

All coils are designed for low pressure drop with sloping tubes for free drainage of fluid.

### 3. Air movement system



- The air movement system consists of **multiple, direct driven radial fans** made of aluminum, mounted on **EC/PM motors with integrated control electronics**. They are completely **maintenance free** and guarantee **redundancy**.
- Air guiding channels installed above the fans allow a direct, vertical and **uniform air distribution** over the entire footprint of the condensing coil for **optimal heat transfer**.
- EC/PM motors have an efficiency level that significantly **exceeds efficiency class IE4** and enable **speed control without an additional variable frequency drive** and shielded cables.
- All motor types are wired to an IP66 terminal box, to avoid time-consuming on-site wiring.
- **Drift eliminators** come in UV-resistant plastic, which will not rot, decay or decompose and their performance is tested and **certified by Eurovent**. They are assembled in **easily handled and removable sections**, for easy inspection of the water distribution system.
- Steel drift eliminators, protected with the unique [Baltibond® hybrid coating](#) for optimal corrosion protection, are also available for specific applications.



## 4. Water distribution system

These consist of:

- **Spray branches** with wide non-clog plastic **nozzles**, secured by rubber **grommets**. You can easily remove, clean and flush both nozzles and spray branches from outside the unit.
- A [DiamondClear® Design water collection system](#) with:
  - Sloping channels that are continuously cleaned through direct impact of falling spray water, minimizing the need for maintenance
  - A sloping and free draining cold water basin with minimal surface and volume, which makes it subject to high turbulences during operation, thereby reducing the need for cleaning and chemical usage.
- A close couple, stainless steel fitted centrifugal **spray pump** with totally enclosed fan cooled (TEFC) motor, installed horizontally to **reduce the basin water volume**. Water treatment system connections in the pump piping and cold water basin are provided as standard.
- An **electrical water level controller** is standard installed increasing the equipment reliability and helping to maintain you system year-round. This controller is installed together with a solenoid activated valve in the make up water line. This valve closes slowly to minimize water hammer.

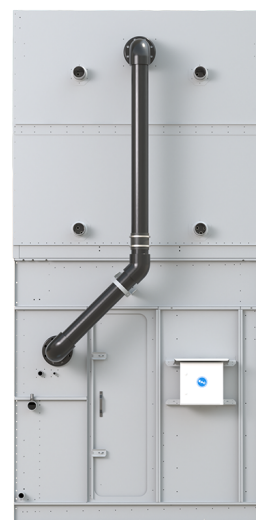

The dry area underneath the sloping channels is accessible via the **man-sized rectangular access door** and provides **full access to all components of the lower section** without the need to step into any wet areas, thus making it **quick and safe to inspect and maintain** the system.

**Like to know more about the Polairis™ construction details?**

Contact your [local BAC representative](#).